

S-Band Radar 50Ω Transistor - GaN

- GaN on SiC HEMT Technology
- $P_{OUT-PK} = 135W @ 300us/10%/46V$
- 3.1-3.5GHz Instantaneous Operating Frequency Range
- 50Ω Internally Impedance Matched Device
- Depletion Mode Device
- Negative Gate Voltage and Bias Sequencing Required
- Metal Based Package Sealed With Ceramic-Epoxy Lid
- Gold Metallization System: Chip - Wire Bond - Package
- Package Size Bolt Down: W=0.800"(20.32mm), L=0.400"(10.16mm)
- Package Size S(earless): W=0.400"(10.16mm), L=0.400"(10.16mm)
- 100% High Power RF Tested in Broadband RF Test Fixture



| PARAMETER | SYM | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|-------------------------------------|-------------|-------|-------|-------|-------|---|
| DC ELECTRICAL SPECIFICATIONS | | | | | | |
| Drain Leakage Current | I_{D-OFF} | -- | 1.0 | -- | mA | $V_{DS}=50V, V_{GS}=-8V, T_{F1}, S1$ |
| Gate Threshold Voltage | V_{GS-TH} | -- | -2.8 | -- | V | $V_{DS}=5V, I_D=100mA, T_{F1}, S1$ |
| RF ELECTRICAL SPECIFICATIONS | | | | | | |
| Input Return Loss | IRL | -18 | -10 | -7 | dB | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Power Gain | Gp | 12.5 | 13.5 | 15.5 | dB | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Drain Efficiency | N_D | 50 | 55 | 75 | % | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Pulse Amplitude Droop | D | -0.80 | -0.40 | +0.20 | dB | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Delta Inter-pulse Insertion Phase | DIP | -30 | -- | +30 | DEG | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Load Mismatch Stability | VSWR-S | 3:1 | -- | -- | -- | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |
| Load Mismatch Tolerance | VSWR-T | 8:1 | -- | -- | -- | POUT1, V1, I_{DQ1} , PW1, DF1, F1, F2, F3, $T_{F1}, S1$ |

| PARAMETER | SYM | MIN | NOM | MAX | UNITS | TEST CONDITIONS |
|------------------------------------|-----------|-----|------|-----|-------|-----------------|
| DC & RF TEST CONDITIONS | | | | | | |
| Output Power 1 | POUT1 | -- | 135 | -- | W | -- |
| Drain Supply Voltage 1 | V1 | -- | 46.0 | -- | V | -- |
| Quiescent Drain Current 1 | I_{DQ1} | 20 | 25 | 30 | mA | -- |
| Pulse Width 1 | PW1 | -- | 300 | -- | us | -- |
| Duty Factor 1 | DF1 | -- | 10 | -- | % | -- |
| Frequency 1 | F1 | -- | 3.1 | -- | GHz | -- |
| Frequency 2 | F2 | -- | 3.3 | -- | GHz | -- |
| Frequency 3 | F3 | -- | 3.5 | -- | GHz | -- |
| Flange Temperature 1 | T_{F1} | 20 | 25 | 30 | °C | -- |
| Screening Level 1 | S1 | 100 | -- | -- | % | -- |

| PARAMETER | SYM | MIN | MAX | UNITS | SCREEN | CONDITIONS |
|--|--------------|-----|------|--------------------|--------|--------------------------|
| MAXIMUM RATINGS | | | | | | |
| Drain-Source Voltage | V_{DS} | -- | 60 | V | BD | $T_F = 25^\circ\text{C}$ |
| Gate-Source Voltage | V_{GS} | -10 | 0 | V | BD | $T_F = 25^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 | +150 | $^\circ\text{C}$ | BD | -- |
| Operating Junction Temperature | T_J | -55 | +200 | $^\circ\text{C}$ | BD | -- |
| PROCESS SPECIFICATIONS | | | | | | |
| DC Wafer Probe | -- | -- | -- | -- | 100% | Per Integra Spec |
| Wafer DC, RF Qualification | -- | -- | -- | -- | Q1 | Per Integra Spec |
| Wire Bond Strength | -- | -- | -- | -- | LM | Per Integra Spec |
| Pre-cap Visual Inspection | -- | -- | -- | -- | 100% | Per Integra Spec |
| Gross Leak Test – MIL-STD-750D | -- | -- | -- | -- | 100% | Method 1071.6 C |
| THERMAL RESISTANCE | | | | | | |
| Peak Thermal Resistance Per Rated RF Specification | $R_{TH(JC)}$ | -- | 0.60 | $^\circ\text{C/W}$ | BD | $T_F = 25^\circ\text{C}$ |
| Peak Thermal Resistance at PW=100us/20% | $R_{TH(JC)}$ | -- | 0.48 | $^\circ\text{C/W}$ | BD | $T_F = 25^\circ\text{C}$ |
| SCREENING LEVELS | | | | | | |
| Parameter Qualified By Design | BD | -- | -- | -- | -- | -- |
| Parameter Qualified By 3 Pieces (min) Per Wafer | Q1 | -- | -- | -- | -- | -- |
| Parameter Qualified By Assembly Line Monitor | LM | -- | -- | -- | -- | -- |

RF TEST FIXTURE – 50Ω BROADBAND

- ▶ Broadband RF Test Fixture. Provides 50Ω Impedance To the Device Across the Rated Operating Frequency Range.
- ▶ Electronic CAD Drawing File Available Upon Request. Includes Circuit Dimensions and Parts List.
- ▶ Reference Design PCB: Rogers RO4350B-03011, DK=3.48.



DC BIAS SEQUENCING**Turn ON GaN Device**

1. RF Power OFF
2. Set VGS = -5V (Negative Voltage to pinch off)
3. Measure VDS impedance, should be pinched off.
4. Turn ON VDD voltage.
5. Slowly increase VGS until bias current IDQ is set.
6. Turn ON RF Power

Turn OFF GaN Device

1. Turn OFF RF Power
2. Turn OFF VDD voltage
3. After VDD is discharged, set VGS = -5V
4. Turn OFF VGS voltage.

PACKAGE OUTLINE DRAWING

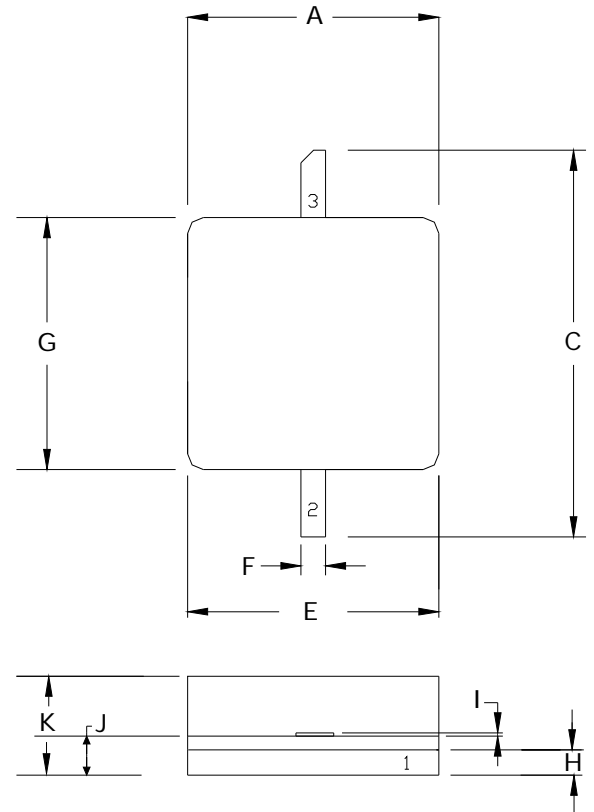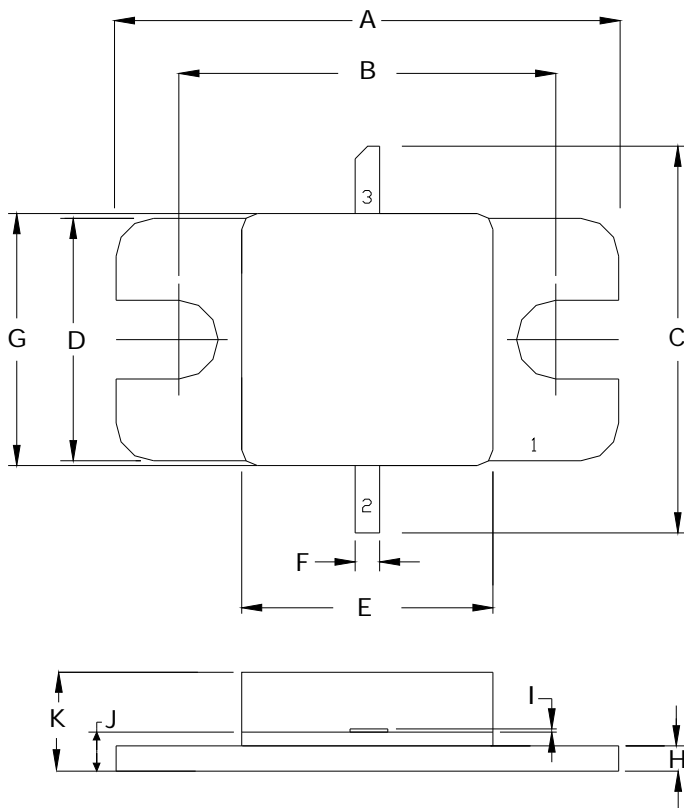

BOLT DOWN VERSION - IGT3135M135

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.795 | 0.805 | 20.19 | 20.45 |
| B | 0.595 | 0.605 | 15.11 | 15.37 |
| C | 0.579 | 0.649 | 14.71 | 16.48 |
| D | 0.380 | 0.390 | 9.65 | 9.91 |
| E | 0.393 | 0.420 | 9.98 | 10.67 |
| F | 0.034 | 0.044 | 0.86 | 1.12 |
| G | 0.393 | 0.420 | 9.98 | 10.67 |
| H | 0.035 | 0.045 | 0.89 | 1.14 |
| I | 0.004 | 0.006 | 0.10 | 0.15 |
| J | 0.055 | 0.069 | 1.40 | 1.75 |
| K | 0.131 | 0.181 | 3.33 | 4.60 |

'S' VERSION - IGT3135M135S

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.393 | 0.420 | 9.98 | 10.67 |
| C | 0.579 | 0.649 | 14.71 | 16.48 |
| E | 0.393 | 0.420 | 9.98 | 10.67 |
| F | 0.034 | 0.044 | 0.86 | 1.12 |
| G | 0.393 | 0.420 | 9.98 | 10.67 |
| H | 0.035 | 0.045 | 0.89 | 1.14 |
| I | 0.004 | 0.006 | 0.10 | 0.15 |
| J | 0.055 | 0.069 | 1.40 | 1.75 |
| K | 0.131 | 0.181 | 3.33 | 4.60 |
| | | | | |
| | | | | |

| PIN SCHEDULE | |
|--------------|--------|
| 1 | SOURCE |
| 2 | GATE |
| 3 | DRAIN |

| PIN SCHEDULE | |
|--------------|--------|
| 1 | SOURCE |
| 2 | GATE |
| 3 | DRAIN |

DEFINITIONS**DATA SHEET STATUS**

| | |
|---------------------------|---|
| Proposed Specification | This data sheet contains proposed specifications. |
| Preliminary Specification | This data sheet contains specifications based on preliminary measurements and data. |
| Product Specification | This data sheet contains final product specifications. |

MAXIMUM RATINGS

Stress above one or more of the maximum ratings may cause permanent damage to the device. These are maximum ratings only operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to maximum values for extended periods of time may affect device reliability.

DISCLAIMER

Integra Technologies Inc. makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Integra Technologies Inc. assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Integra Technologies Inc. products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Integra Technologies Inc. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Integra Technologies Inc. for any damages resulting from such improper use or sale.